

# AUTOMOTIVE

## LOAD BINDERS

- Forged and heat treated
- With two strong, full rotation swivels
- Profiled mid-section to give extra stability
- Working load limit rating embossed on handle



Model No.	Chain Size"	WLL lbs.	Wt. lbs.	Type	Price /Each
LT465	1/4 - 5/16	2600	3.5	Lever Chain	
LT466	5/16 - 3/8	5400	8.1	Lever Chain	
LT467	3/8 - 1/2	9200	12.4	Lever Chain	
LT462	1/4 - 5/16	2600	3.7	Ratchet Tie Down	
LT463	5/16 - 3/8	5400	10	Ratchet Tie Down	
LT464	3/8 - 1/2	9200	12.9	Ratchet Tie Down	
LT468	5/16 - 3/8	5400	8.9	Recoilless Load Binder	

## GRADE 70 TRANSPORT CHAIN TIE-DOWNS

- Manufactured in accordance with the Department of Transportation regulations
- Each assembly has a rating tag attached to meet NSC Standard 10 requirements
- Includes grade 70, alloy steel clevis grab hooks on each end
- Designed for use in cargo securement, towing and logging
- Grade 70 chains must not be used for overhead lifting
- High quality stamped grade 70 chain links
- Yellow chromate finish
- Design factor 4:1



Model No.	Chain Length"	Trade Size	Working Load Limit	Price /Each
LU982	20' (6.1 m)	5/16"	4700 lbs. (2.35 tons)	
LU983	25' (7.6 m)	5/16"	4700 lbs. (2.35 tons)	
LU984	20' (6.1 m)	3/8"	6600 lbs. (3.3 tons)	
LU985	25' (7.6 m)	3/8"	6600 lbs. (3.3 tons)	

## SINGLE SPEED TRAILER WINCHES

- Clear Zinc finish for superior corrosion resistance
- Solid drum gear construction delivers smooth cranking & durability
- Designed to meet your toughest pulling demands
- 5 year limited warranty
- Corrosion protection, tested up to 600 hour salt spray rating as per ASTM B117
- For use with strap or rope



Model No.	Mfg No.	Rope Storage Cap.	Strap Storage Cap.	Strap Included /Not Included	Rope Included /Not Included	Recommended Strap Bolt Sizes	Working Load Limit	Gear Ratio	Handle Length"	Price /Each
LV332	142001	36' x 1/4"	15' x 2"	Not Included	Not Included	1/4" x 2-1/2" Grade 5	900 lbs. (409 kg)	39:1	7	
LV333	142006	36' x 1/4"	12' x 2"	Included	Not Included	1/4" x 2-1/2" Grade 5	900 lbs. (409 kg)	39:1	6	
LV334	142100	30' x 5/16"	20' x 2"	Not Included	Not Included	1/4" x 2-1/2" Grade 5	1100 lbs. (500 kg)	43:1	7	
LV335	142102	30' x 5/16"	20' x 2"	Included	Not Included	1/4" x 2-1/2" Grade 5	1100 lbs. (500 kg)	43:1	7	
LV336	142103	30' x 5/16"	20' x 2"	Not Included	Not Included	1/4" x 2-1/2" Grade 5	1300 lbs. (500 kg)	49:1	8	
LV337	142320	N/A	20' x 2"	Included	Not Included	5/16" x 2-1/2" Grade 5	1400 lbs. (636 kg)	43:1	8	
LV338	142311	N/A	20' x 2"	Included	Not Included	5/16" x 2-1/2" Grade 5	1500 lbs. (681 kg)	43:1	8	
LV339	142200	20' x 5/16"	20' x 2"	Not Included	Not Included	1/4" x 2-1/2" Grade 5	1500 lbs. (681 kg)	49:1	8	
LV340	142203	20' x 5/16"	20' x 2"	Included	Not Included	1/4" x 2-1/2" Grade 5	1500 lbs. (681 kg)	49:1	8	
LV341	142300	20' x 7/16"	20' x 2"	Not Included	Not Included	3/8" x 2-3/4" Grade 5	1800 lbs. (818 kg)	62:1	10	
LV342	142305	20' x 7/16"	20' x 2"	Included	Not Included	3/8" x 2-3/4" Grade 5	1800 lbs. (818 kg)	62:1	10	
LV343	142314	N/A	20' x 2"	Included	Not Included	3/8" x 2-3/4" Grade 5	1800 lbs. (818 kg)	62:1	10	

## TWO SPEED TRAILER WINCHES


- Two speed winches includes one fast speed for quick pull-in and second for low speed
- Free-wheel position allows quick line pay out without spinning the handle
- Corrosion protection, tested up to 600 hour salt spray rating as per ASTM B117
- Shift lock holds the shaft in gear
- 5 year limited warranty
- For use with strap only



Model No.	Mfg No.	Cable Storage Cap.	Strap Storage Cap.	Strap Included /Not Included	Rope Included /Not Included	Hub Size	Working Load Limit	Gear Ratio	Handle Length"	Price /Each
LV344	142400	N/A	20' x 2"	Not Included	Not Included	1"	2000 lbs. (909 kg)	87:1	10	
LV345	142410	N/A	20' x 2"	Not Included	Not Included	1"	2600 lbs. (1181 kg)	108:1	10	
LV346	142420	100' x 7/32"	N/A	Not Included	Not Included	1-3/4"	3200 lbs. (1455 kg)	79:1	10	
LV347	142430	90' x 7/32"	N/A	Not Included	Not Included	1-3/4"	3700 lbs. (1682 kg)	102:1	10	

## AUTOMATIC BRAKE WINCHES

- Positive holding action of the brake system while raising and lowering loads provides the needed control for safety
- Holds the load securely when the crank handle is released
- Comfort grip handle for a positive hold while cranking
- Working load limit is based on maximum 1st layer rated line pull
- For use with 7 x 19 Aircraft cables only
- 5 year limited warranty
- Corrosion protection, tested up to 600 hour salt spray rating as per ASTM B117
- Handle Length: 11"

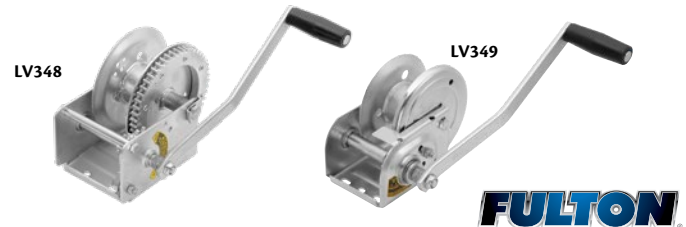

Model No.	Mfg No.	Drum Hub Diameter	Covered Gears	Cable Included /Not Included	Working Load Limit	Max. Cable Diameter	Cable Storage Capacity	Gear Ratio	Handle Length"	Price /Each
LV348	143001	2-1/4"	No	Not Included	1000 lbs. (454 kg)	7/32"	50' (15 m)	4.1:1	11	
LV349	143005	2-1/4"	Yes	Not Included	1000 lbs. (454 kg)	7/32"	50' (15 m)	4.1:1	11	
LV350	143100	2-1/2"	No	Not Included	1500 lbs. (681 kg)	1/4"	70' (21 m)	5.1:1	11	
LV351	143104	2-1/2"	Yes	Not Included	1500 lbs. (681 kg)	1/4"	70' (21 m)	5.1:1	11	
LV352	143200	3-1/8"	No	Not Included	2500 lbs. (1136 kg)	5/16"	70' (21 m)	15.8:1	11	